

PRODUCT IMAGE / IMAGE DU PRODUIT




GENERAL SPECIFICATIONS / SPECIFICATION GÉNÉRALES

Classification / Classification	Nickel Metal Hydride
Battery Type / Type de Batteries	C
Nominal voltage / Tension Nominale	1.2V
Nominal capacity / Capacité Nominale	3000mAh
Minimal capacity / Capacité Minimale	2900mAh
Weight / Poids	59.0 g

CHARGING INFORMATION / INFORMATION SUR LA CHARGE


Standard Charge Charge Standard	290mA×16h
Rapid Charge Charge Rapide	5-10mV
Internal Impedance Impédance Interne	≤35mΩ after standard charge at 1 kHz for 1 hour
Cycle Life Cycle de Vie	> 500
Max Continuous Discharge Current Courant Maximal de Charge	5800mA

DIMENSIONS




D	28.5 ⁺⁰ _{-0.7} mm
H	50.5 ⁺⁰ _{-1.5} mm
D ¹	6.5 ⁺⁰ _{-0.2} mm
H ¹	2.5 ^{+0.2} mm

DISCHARGE CHARACTERISTICS
CARACTERISTIQUES DE DECHARGE

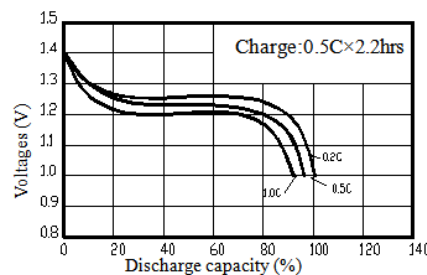

CHARGE CHARACTERISTICS
CARACTERISTIQUES DE CHARGE

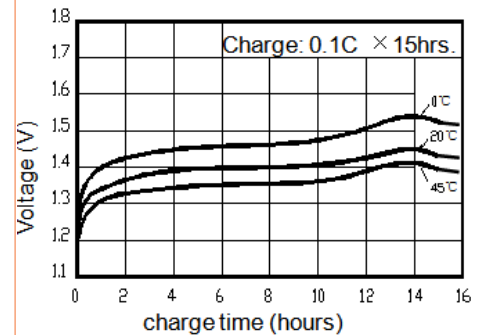

AMBIENT TEMPERATURE RANGE / PLAGE DE TEMPERATURE AMBIANTE

Operating temperature range for humidity: +65%± 20% Température d'utilisation avec une humidité de 65%± 20%	Standard charge / Charge Standard Rapid charge / Charge Rapide Floating charge / Charge Flottante Discharge / Décharge	0 to +45°C (32 to 113°F) 10 to +45°C (50 to 113°F) -10 to +45°C (14 to 113°F) -20 to +65°C (-4 to 149°F)
Storage temperature range for humidity: +65%±20% Température de stockage avec une humidité de 65%± 20%	Within 1 year / Première année Within 6 months / Premiers 6 mois Within 30 days / Premiers 30 jours	-20 to +35°C (-4 to 95°F) -20 to +45°C (-4 to 113°F) -20 to +55°C (-4 to 131°F)
Discharge at low Temperature Décharge à basse température	> 4.25h at 0°C±2°C with 0.2C mA, after stored at 0°C±2°C for 24 hours	
Ambient Temperature for operation and storage Température ambiante pour utilisation et stockage	20°C±5%	
Humidity for operation and storage Humidité pour utilisation et stockage	65%±20%	

*The above information is generally descriptive only and is not intended as guarantee or warranty
**Uniross reserves the right to alter or amend the design, model and specification without prior notice.
www.uniross.com