

PRODUCT IMAGE / IMAGE DU PRODUIT




GENERAL SPECIFICATIONS / SPECIFICATION GÉNÉRALES

Designation IEC Désignation IEC	4R25
Technology Technologie	Zinc Carbon
Chemical system Système chimique	ZN/CA
Nominal voltage Tension nominale	6V
Average weight [g] Poids moyen [g]	510g
Shelf life Durée de vie	3 years / 3 ans 21°C
Operating Temperature Range Température d'utilisation	-18°C to +45°C
Storage Temperature Range Température de stockage	5°C to +30°C
Recommended applications Applications recommandées	Lighting equipment / Matériel d'éclairage

PERFORMANCE CHARACTERISTICS / CARACTÉRISTIQUES DE PERFORMANCE

Applications Applications	Load / Charge	Discharge Mode Mode de décharge	End Voltage Tension de fin	Normal Duration Durée normale	Unit / Unité
Barricade Lighting	110Ω	12h/d	3.6V	190	Hr
Portable lighting	8.2Ω	30min/d	3.6V	660	min
Portable lighting	9.1Ω	30min/d, 8h/d	3.6V	700	min
Reference	15.6Ω	24h/d	3.6V	1200	min

PRODUCT DIMENSION / DIMENSION DU PRODUIT

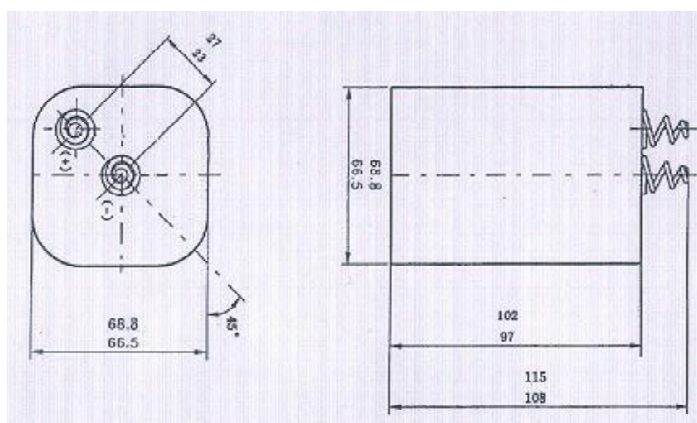

*The above information is generally descriptive only and is not intended as guarantee or warranty
**Uniross reserves the right to alter or amend the design, model and specification without prior notice.